

M2000A

Bench Calibrator
Lab Standard
Voltage/Current Calibrator



Setting a new
standard in lab
calibrator value

The Martel M2000A Bench Calibrator sets a new standard in lab calibrator value — the M2000A features the accuracy and stability of calibration sources costing twice as much — and provides useful features no other calibrator offers in its class! Despite its world-class performance and powerful operating features, the M2000A Calibrator is very simple to setup and use.

Features

- Superior calibration accuracy
- Direct keyboard entry or cursor entry with decade control
- Automatic standby function protects device under test
- Nine (9) manual/automatic setpoints per output range
- Local or RS232 remote control
- IEEE-488 (GPIB) port included
- Compatible with Fluke Met/Cal® software
- Optional rack/panel mount kit available

Simple Data Entry

The M2000A provides simple, front-panel control of output voltage or current using either direct keyboard entry or cursor entry. The M2000A calibrator has an automatic OPERATE/STANDBY function, which not only protects the device under test and the M2000A from overload conditions, but also provides UL/CSA-certified safe operation when ranging to output voltages over 30V. A second function key provides easy access for up to nine setpoints for each output range that can be recalled individually at the touch of a button, or can be stepped through automatically with control of the setpoint dwell time.



Remote Control

All of the M2000A operating functions can be accessed via RS232 using a standard PC running Fluke Met/Cal® software, Windows® HyperTerminal, Visual Basic or any other software using an ASCII interface. An IEEE-488 bus interface is available as an option.

Rock-Solid Stability

The M2000A stability and accuracy is traceable to National standards. The accuracy of the M2000A is specified for both 90-day and one-year intervals.



M2000A

www.chamois.net

Specification (1 year at 23°C ±5°C unless noted)

OUTPUT VOLTAGE		
Ranges & Resolutions	0 to 100 mV range	1 µV
	0 to 1 V range	10 µV
	0 to 10 V range	100 µV
	0 to 100 V range	1 mV
Accuracy (% of reading)	0 to 100 mV range	±0.003% (30 ppm) ± 3.0 µV
	0 to 1 V range	±0.003% (30 ppm) ± 20.0 µV
	0 to 10 V range	±0.003% (30 ppm) ± 200.0 µV
	0 to 100 V range	±0.003% (30 ppm) ± 2.0 mV
Maximum Burden (≤ 1 Ohm output impedance)	0 to 100 mV range	10 mA
	0 to 1 V range	10 mA
	0 to 10 V range	10 mA
	0 to 100 V range	1 mA (10 mA @ 24 VDC)
Output Current	Range	0 to 100.000 mA
	Resolution	1 µA
	Accuracy (% of reading)	±0.01% ± 2 µA
	Maximum Burden	10 V
STABILITY		
Warm up time	30 minutes to rated accuracy	
TEMPERATURE COEFFICIENT (<18°C/>28°C)		
	10% of accuracy spec/°C	
TEMPERATURE RANGE		
Operating	0°C to 50°C	
Storage	-20°C to 70°C	
POWER REQUIREMENTS		
Voltage Range	90 to 240 VAC (factory set)	
MECHANICAL		
Dimensions	29.21 cm x 11.83 cm x 22.00 cm	
Weight	2.27 kg	
Display	16 large characters x 2 lines Alphanumeric, backlit high contrast LCD	




Ordering Information

M2000A
M2000A High accuracy V/I Lab standard with IEEE-488 interface 120V 1919092
240V 1919138



0822

All devices can be supplied with a UKAS accredited calibration certificate from our laboratory.

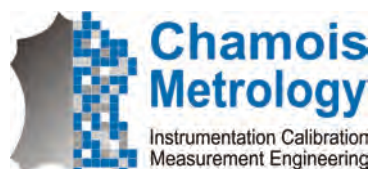

Chamois Metrology Limited

Unit 8 The Centre, Holywell Business Park, Northfield Road, Southam, Warwickshire CV47 0FP
Tel +44 (0)1926 812066 Fax +44 (0)1926 813569 e: info@chamois.net www.chamois.net